



PRODUCT INFORMATION

Model

Bio Bull CR Extreme

Revision

12-2024




Motor

John Deere industrial engine Stage 5 173 Hp common rail diesel engine with turbo and intercooler.

Benefits of this engine:

- Low fuel consumption.
- Worldwide service network of John Deere.

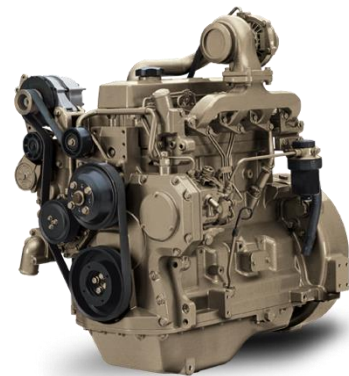

Bio Bull Crop Rotation B.V.
Lodderhoeksestraat 14
6687 LS, Angeren
The Netherlands

www.bio-bull.com
info@bio-bull.com
+31 621 298 920

COC: 93652291
VAT: NL866481382B01
Bank: NL28RABO 0189 5216 43
BIC: RABONL2U



Operator/Driving force

Hydraulic drive of conveyor and cloth roll. The machine is equipped with 2 LS pumps operating in separate systems. These pumps are assembled directly on the flywheel of the engine.

Benefits:

- 2 pumps prevent unwanted speed differences when you are entering and cloth rolling at the same time.
- Directly driven pumps ensure a compact construction and no maintenance costs.
- Danfoss hydraulic control valves for proper and smooth operation of the machine.

Infeed table

Importation table with on both sides a roll-up unit for cloth up to 200 meters. Operation only on one side at a time. The diablo rollers over which the canvas runs are hydraulically foldable. High ridges on the elevator belt will rise up for the good upwards conveying of the product.



Benefits:

- Hydraulically foldable rollers ensure a quick change of cloth and relieving the back.

Bio Bull Crop Rotation B.V.
Lodderhoeksestraat 14
6687 LS, Angeren
The Netherlands

www.bio-bull.com
info@bio-bull.com
+31 621 298 920

COC: 93652291
VAT: NL866481382B01
Bank: NL28RABO 0189 5216 43
BIC: RABONL2U




Control panel

Remote control of the machine, system Hetronic.

Benefits:

- Operation is always possible from the place with the most visibility and is therefore safe.
- The machine is operated by remote control, allowing you to stay out of the danger zone of the machine.
- Hetronic is known worldwide, highly durable and trouble-free.

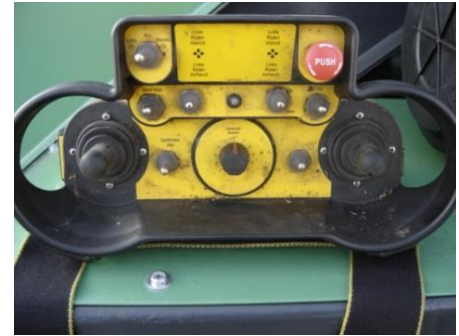

Chassis

VTS undercarriage with rubber tracks and 2 driving speeds.

Dimensions

Machine dimensions approximate:

- Width caterpillar's exterior frame about 2.4 meters.
- Width 2.4 meters.
- Height 2.5 meters.
- Length 7.5 meters.
- Weight +/- 6.000 kg.
- Canvas width up to 1400 mm.

Capacity

Up to 20 000 m² per hour.

Optional

- Hopper 15 m³.
- Automatic lubrication system.
- Cleanfix Fan